


10 075 2MG 00 GROHTHERM F TERMOSTATSKI SET ZA ZAVRŠNU INSTALACIJU S UGRAĐENIM DVOSMJERNIM PREBACIVAČEM




OPIS PROIZVODA

- Colour: satin graphite
- za kadu ili tuš s više od jednog izlaza
- for use with Rapido T rough-in box 35 500 000 sold separately
- GROHE LongLife premaz
- GROHE SafeStop na 38°C
- GROHE SafeStop Plus uključen opcionalan limitator temperature na 43°C
- metal handle for temperature control
- metal handle for Aquadimmer control with multiple function- shut off and flow control - diverter for 2 outlets
- 3rd outlet requires separate volume control
- četvrtasta metalna rozeta sa skrivenim pričvršćenjem
- flow rate:
 - - max. 53 l/min at 3 bar by using all 3 outlets at the same time
 - - bottom outlet 50 l/min. at 3 bar
 - - top outlet left (bath) 30 l/min. at 3 bar
 - - top outlet right (shower) 24 l/min at 3 bar

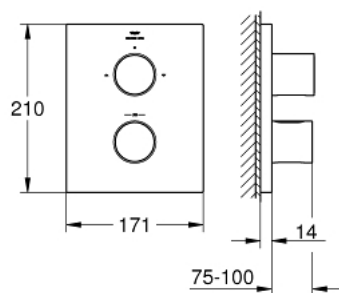

10 075 2MG 00 GROHTHERM F TERMOSTATSKI SET ZA ZAVRŠNU INSTALACIJU S UGRAĐENIM DVOSMJERNIM PREBACIVAČEM

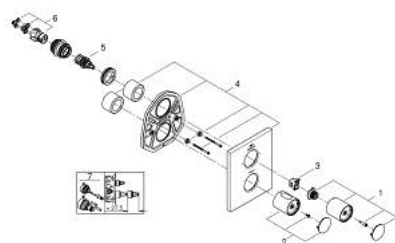

REZERVNI DIJELOVI, listopada 2022 – now

- 1: shut-off handle (Br. narudžbe 47898MG0)
- 2: Ručica za kontrolu temperature (Br. narudžbe 47900MG0)
- 3: Sigurnosna brtva (Br. narudžbe 10089000)
- 4: escutcheon (Br. narudžbe 47901MG0)
- 5: Aquadimmer (Br. narudžbe 47364000)
- 6: Adapter (Br. narudžbe 12701001)
- 7: Set za produljenje 27.5 mm (Br. narudžbe 47781000)*

* Izborni dodaci